



Total Solution Provider in Saw Device

SA412DP1

CDMA 450 L-Band , RF-Tx SAW Filter
Revision 0: February 2009



- Electrical Characteristics
 - Package Dimensions
 - Testing Environment
 - Frequency Characteristics
-

SAWNICS Inc.

460 Cheonheung-ri, Seonggeo-eup, Cheonan-si, Chungcheongnam-do, 330-836 / Korea.
Tel: +82 41 550 9372 / Fax: +82 41 550 9399 / www.sawnics.com

□ Electrical Characteristics

Maximum Ratings


Parameters Description	Unit	Minimum	Typical	Maximum
Operating Temperature Range	°C	-30	-	+80
Storage Temperature Range	°C	-40	-	+85
Maximum DC Voltage	V	-	-	0
Maximum Input Power	dBm	-	-	27
Source Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Load Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Package type & size	P1			
Length x Width	mm ²	-	3.8 x 3.8	-
Height	mm	-	-	1.4

Electrical Specification

Parameters Description	Unit	Minimum	Typical	Maximum
Center Frequency (Fo)	MHz	-	412.925	-
Insertion Loss in 410.0 ~ 415.85 MHz	dB	-	2.5	3.5
Attenuation:				
0.3 ~ 400.0 MHz	dB	23	26	-
420.0 ~ 425.85 MHz	dB	30	48	-
425.85 ~ 1700.0 MHz	dB	18	23	-
1700.0 ~ 2000.0 MHz	dB	15	18	-
VSWR in 410.0 ~ 415.85 MHz	-	-	1.3	2.0

Notes : (1) No Matching Network .


Package Dimensions

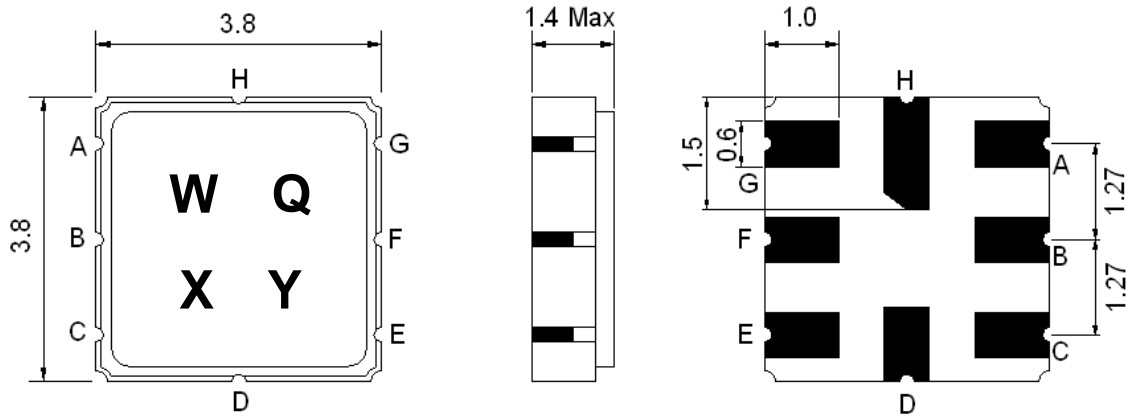

Marking Descriptions	
W	CDMA450 Application
Q	Series Number
X	Date Code(Year)
Y	Date Code(Month)

Pin Description	
A, C, D, E,G,H	Ground
B	In
F	Out

Testing Environment

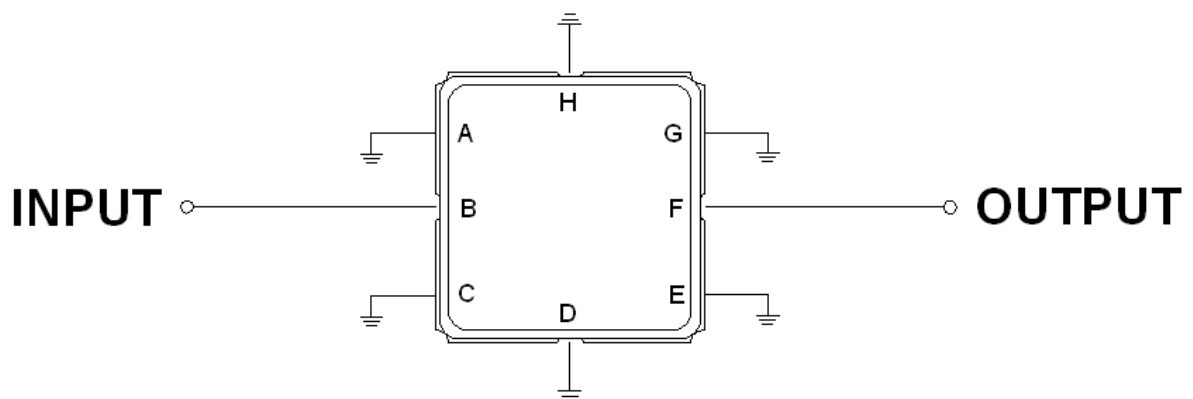

Source & Load Impedance: 50 Ω

□ Frequency Characteristics

Frequency Response

