



Total Solution Provider in Saw Device

SL13520AV

135.0 MHz IF SAW Filter
20.12 MHz Bandwidth
Revision 0: 01. Dec. 2009



- Electrical Characteristics
 - Package Dimensions
 - Testing Environment
 - Frequency Characteristics
-

SAWNICS Inc.

460 Cheonheung-ri, Seonggeo-eup, Cheonan-si, Chungcheongnam-do, 330-836 / Korea.
Tel: +82 41 550 9372 / Fax: +82 41 550 9399 / www.sawnics.com

□ Electrical Characteristics

Maximum Ratings

Parameters Description	Unit	Minimum	Typical	Maximum
Operating Temperature Range	°C	-	25	-
Storage Temperature Range	°C	-40	-	85
Maximum DC Voltage	V	-	-	10
Maximum Input Power	dBm	-	-	10
Source Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Load Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Package type & size	V			
Length x Width	mm ²	-	13.3 x 6.5	-
Height	mm	-	-	1.8


Electrical Specification

Parameters Description	Unit	Minimum	Typical	Maximum
Center Frequency (Fo)	MHz	134.80	135.00	135.20
Insertion Loss at Fo	dB	-	13.2	16.0
Group Delay Variation at Fo ± 9.42 MHz	nsec	-	23	70
Absolute Delay at Fo	usec	-	0.91	-
Passband Ripple Variation at Fo ± 9.42 MHz	dB	-	0.34	1.00
Bandwidth at -1dB	MHz	20.00	20.12	-
Bandwidth at -3dB	MHz	-	20.94	-
Bandwidth at -40dB	MHz	-	24.17	24.90
Ultimate Rejection	dB	40	46	-
Temperature Coefficient	ppm/°C	-	-86	-

Notes : (1) With Matching Network (Ref. Testing Environment Circuit as shown below).

Those impedances could be modified with different impedance values and/or structures, if necessary.


Package Dimensions

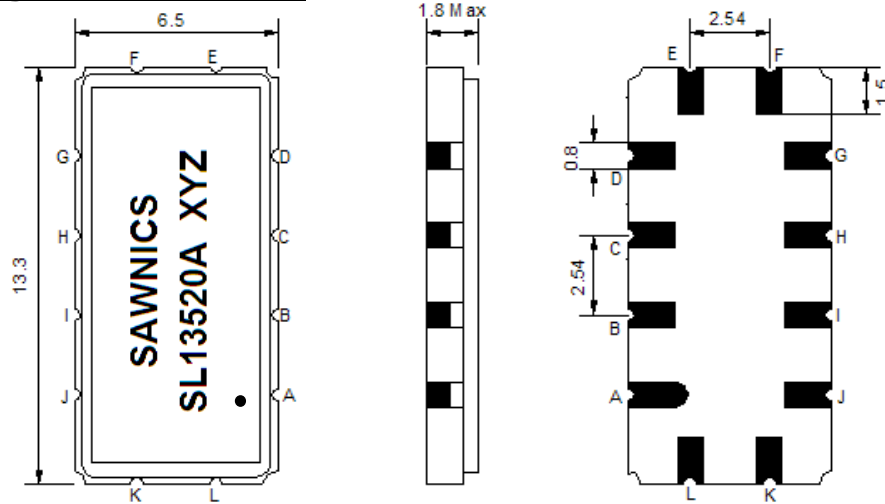

- ① SAWNICS: Brand
- ② SL13520A: Model Name
- ③ X : Date Code (Year)
- ④ Y : Date Code (Month)
- ⑤ Z : Date Code (Date)
- : Index Dot

Pin Description	
A, B, C, D, F, G, H, I, J, L	Ground
K	Input
E	Output

Testing Environment

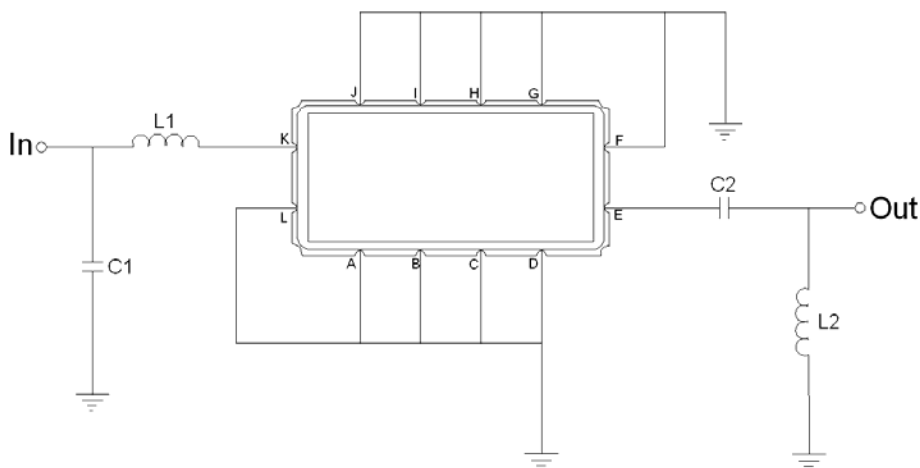


Test Fixture & Values	
Input	L1 = 33 nH, C1 = 51 pF
Output	L2 = 33 nH, C2 = 62 pF
Source/Load Impedance	50 Ω




□ Frequency Characteristics

Frequency Response


Bandwidth at -1.0 dB

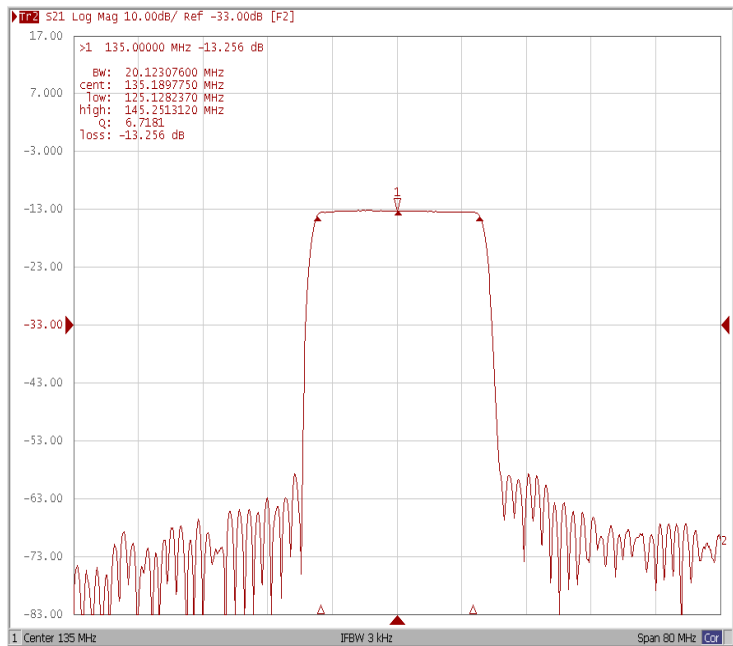


Bandwidth at -3.0 dB

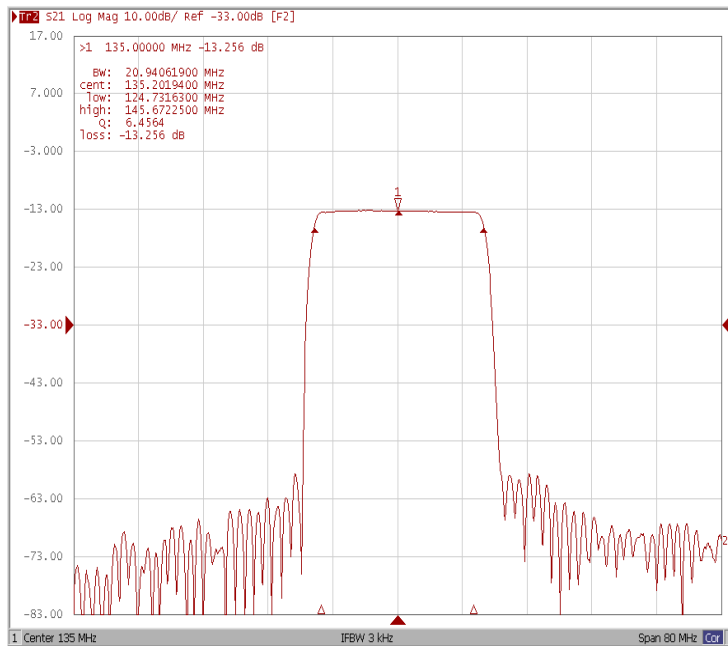

Bandwidth at -20 dB

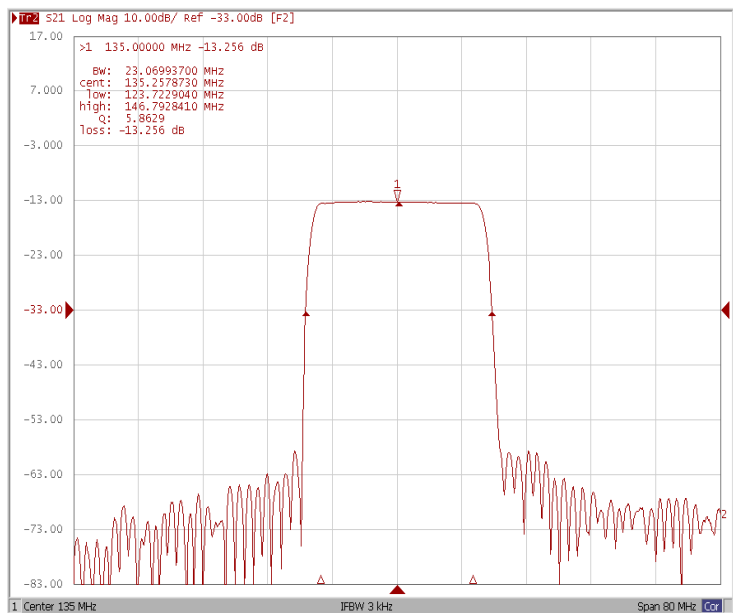

Bandwidth at -40 dB

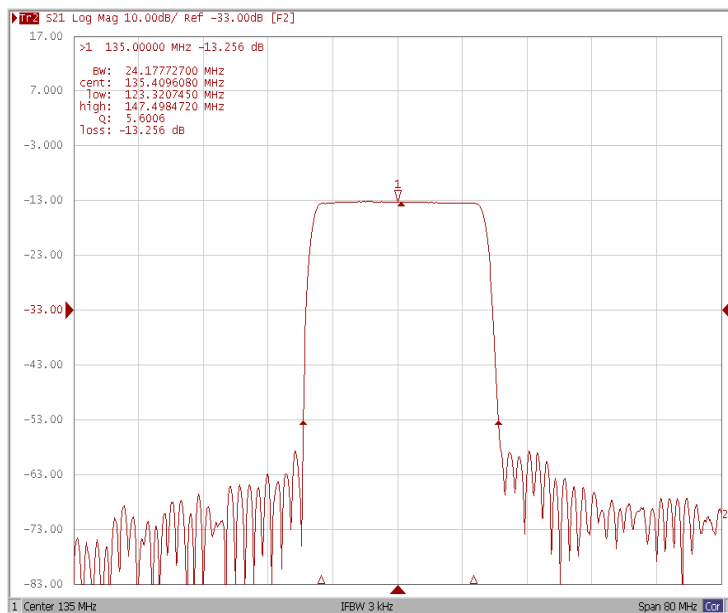





Frequency Characteristics

Frequency Response


Ripple Variation Fo±9.42MHz

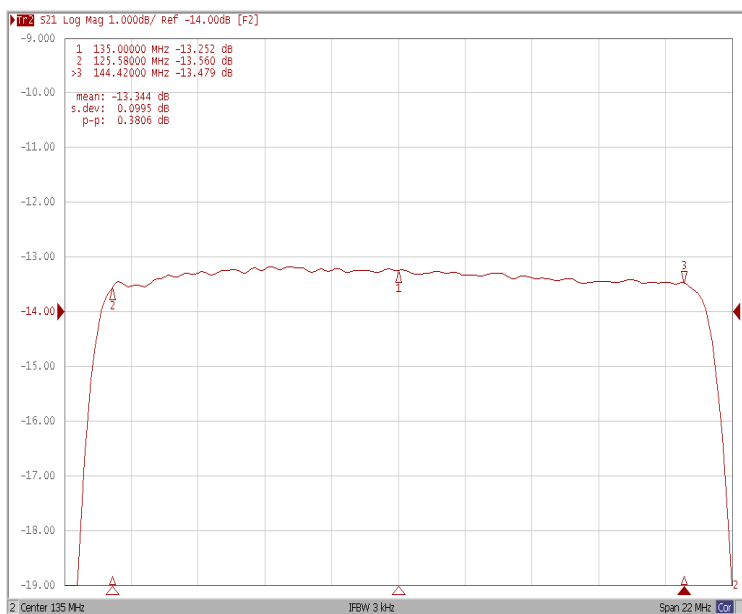

Group Delay Variation Fo±9.42MHz

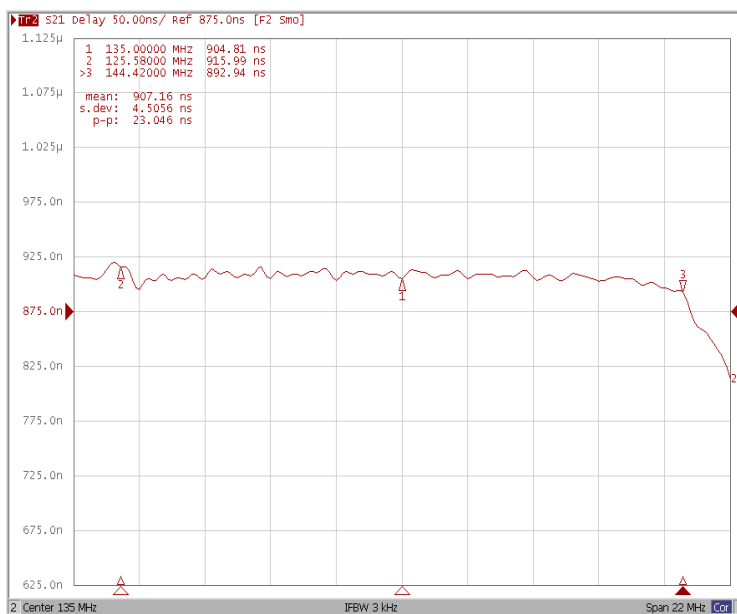

Smith Chart

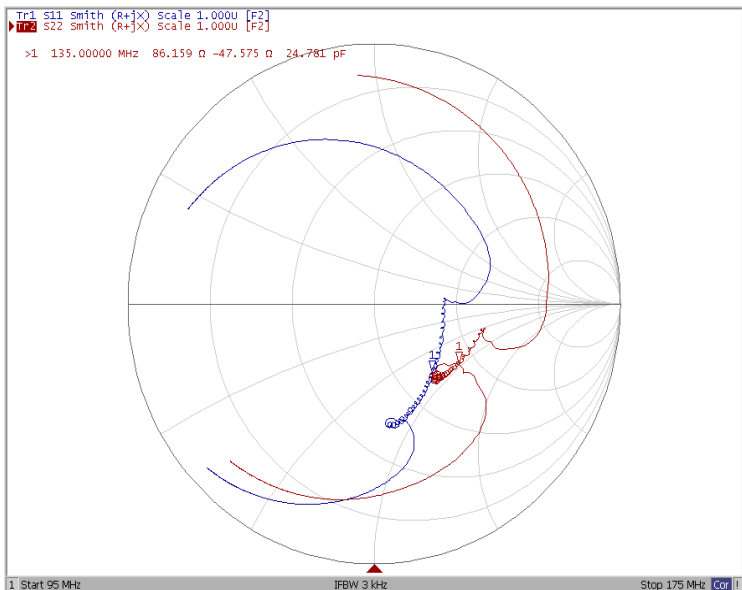

VSWR

